



Optimal Design of Composite Structures by Advanced Mixed Integer Nonlinear Optimization

Marmaras, Konstantinos; Stolpe, Mathias; Lund, Erik; Sørensen, René

Publication date:
2013

[Link back to DTU Orbit](#)

Citation (APA):

Marmaras, K. (Author), Stolpe, M. (Author), Lund, E. (Author), & Sørensen, R. (Author). (2013). Optimal Design of Composite Structures by Advanced Mixed Integer Nonlinear Optimization. Sound/Visual production (digital)

General rights


Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.


Optimal Design of Composite Structures by Advanced Mixed Integer Nonlinear Optimization Techniques

- PhD Student Konstantinos Marmaras – DTU Wind Energy
- Senior Scientist Mathias Stolpe – DTU Wind Energy
- Professor Erik Lund – Aalborg University
- PhD Student René Sørensen – Aalborg University

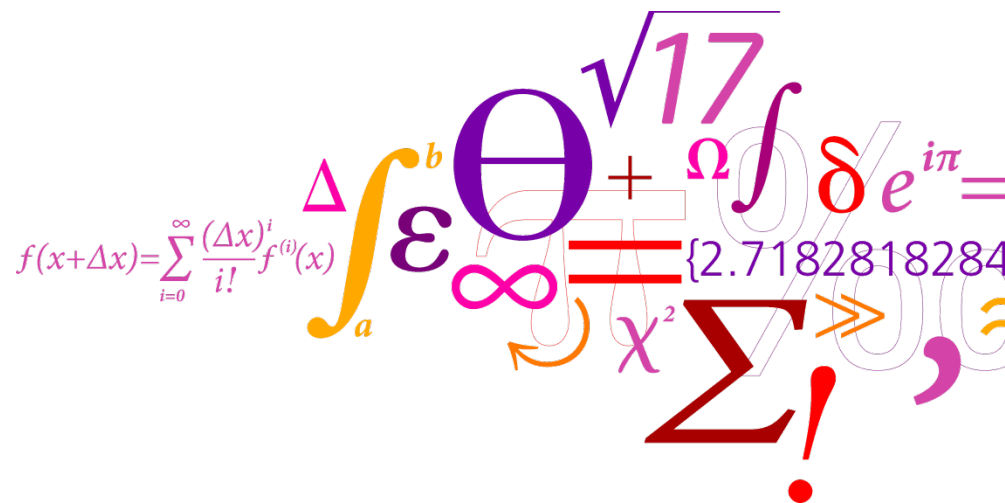

Composite Materials


□ Composite Material

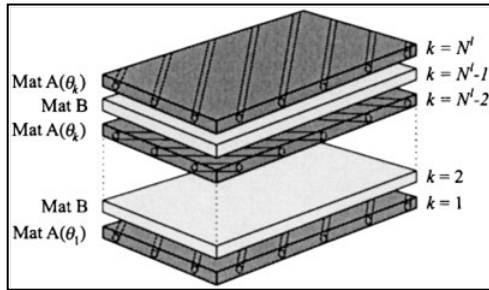

=

□ Fibres

- Glass Fibres
- Carbon Fibres
- Cellulose Fibres
- and more ...



Glass fibres

□ Matrix


- Polymers
- Metals
- Ceramics




Polyester matrix

- We consider **discrete multi material minimum compliance** problems.
- We are dealing with plies that have **constant** and **equal thicknesses** and the **number of layers** is **constant** and non varying through the entire structure.
- Our aim is to solve the considered problems to **global optimality** by modern special purpose **methods** and **heuristics**.

Problem Formulation – Minimum Compliance

minimize	Compliance		minimize $\sum_{l=1}^L w_l f_l^T u_l$
subject to	Equilibrium equations		subject to $K(x)u_l - f_l = 0, \quad l = 1, \dots, L$
	Mass constraint		$m(x) \leq m_c,$
	Manufacturing constraints		$Ax \leq b,$
	Single material selection per layer and element (DMO)		$\sum_{i=1}^{N^i} x_{ijk} = 1, \quad \forall (j, k)$
			$x_{ijk} \in \{0, 1\}, \quad \forall (i, j, k)$

Problem Formulation – Minimum Weight

minimize	Weight		minimize $m(x)$
subject to	Equilibrium equations		subject to $K(x)u_l - f_l = 0, \quad \forall l$
	Compliance Constraint		$f_l^T u_l \leq c_l^{\max}, \quad \forall l$
	Manufacturing constraints		$Ax \leq b,$
	Single material selection per layer and element (DMO)		$\sum_{i=1}^{N^i} x_{ijk} = 1, \quad \forall (j, k)$
			$x_{ijk} \in \{0, 1\}, \quad \forall (i, j, k)$

Problem Formulation – Minimum Compliance

minimize Compliance


subject to Equilibrium equations
 Mass constraint
 Manufacturing constraints
 Single material
 selection per layer
 and element
 (DMO)



$$\begin{aligned}
 &\underset{x, u_1, \dots, u_L}{\text{minimize}} && \sum_{l=1}^L w_l f_l^T u_l \\
 &\text{subject to} && K(x)u_l - f_l = 0, \quad l = 1, \dots, L \\
 & && m(x) \leq m_c, \\
 & && Ax \leq b, \\
 & && \sum_{i=1}^{N^i} x_{ijk} = 1, \quad \forall (j, k) \\
 & && x_{ijk} \in \{0, 1\}, \quad \forall (i, j, k)
 \end{aligned}$$

- Our models closely follow the **Discrete Material Optimization** (DMO) parameterization scheme.
- The design variables associate candidate materials from a given set to each layer and every finite element.
- All **materials** behave **linearly elastic** and the structural behavior of the laminate is described using an **equivalent single layer theory** (ESL).
- The finite element formulations are based on the **first order shear deformation theory** (FSDT).

Reformulation – Nested Analysis and Design

minimize	Compliance		minimize _x	$\sum_{l=1}^L \frac{w_l f_l^T K(x)^{-1} f_l}{}$	$u_l = K(x)^{-1} f_l$
subject to	Mass constraint Manufacturing constraints Single material selection per layer and element (DMO)		subject to	$m(x) \leq m_c,$ $Ax \leq b,$ $\sum_{i=1}^n x_{ijk} = 1, \quad \forall(j, k)$ $x_{ijk} \in \{0, 1\}, \quad \forall(i, j, k)$	

□ (A1) The topology of the structure does not change and the stiffness matrix is **symmetric** and **positive definite**. The stiffness matrix is **linear** (or affine) in the design variables



$$K(x) = \sum_{ijk} x_{ijk} K_{ijk} = \sum_{ijk} x_{ijk} B_j^T C_{ik} B_j = \sum_j B_j^T \left(\sum_{ik} x_{ijk} C_{ik} \right) B_j$$

□ (A2) The external loads $f_l \in R^{n_d} \setminus \{0\}$. Furthermore, we assume that the load vectors are **independent** of the design variables.

□ (A3) The mass limit satisfies $\sum_{j=1}^{N^j} \sum_{k=1}^{N^k} t_k a_j \min_i \{\rho_i\} < m_c < \sum_{j=1}^{N^j} \sum_{k=1}^{N^k} t_k a_j \max_i \{\rho_i\}$

□ (A4) Throughout the weighting factors $w_l \geq 0$ of each load case and satisfy $\sum_{l=1}^L w_l = 1$

Continuous Relaxation – Interior Point Method


minimize	Compliance		$\underset{x}{\text{minimize}} \quad \sum_{l=1}^L w_l f_l^T K(x)^{-1} f_l$
subject to	Mass constraint		$\text{subject to} \quad m(x) \leq m_c,$
	Manufacturing constraints		$Ax \leq b,$
	Single material selection per layer and element (DMO)		$\sum_{i=1}^{N^i} x_{ijk} = 1, \quad \forall (j, k)$
			 $\underline{x_{ijk} \geq 0}, \quad \forall (i, j, k)$

- ☐ By **relaxing** the **integer constraints** on the design variables we get the **continuous relaxation** of the minimum compliance problem.
- ☐ The continuous relaxation is solved by a **primal-dual interior point method**.
- ☐ The continuous problem has a **non empty feasible set**.
- ☐ The objective function is **bounded** from **below** by zero.
- ☐ There is at least one optimal solution of the continuous problem (Weierstrass theorem).
- ☐ Finding a KKT-point to the continuous problem assures **global optimality**.

Heuristic for Minimum Compliance Problems

minimize Distance to 0-1 design

subject to Mass constraint
Manufacturing constraints
Single material
selection per layer
and element
(DMO)



$$\begin{aligned}
 &\underset{x}{\text{minimize}} && \|\bar{x}^0 - x\|_1 \\
 &\text{subject to} && m(x) \leq m_c, \\
 & && Ax \leq b, \\
 & && \sum_{i=1}^{N^i} x_{ijk} = 1, && \forall (j, k) \\
 & && x_{ijk} \in \{0, 1\}, && \forall (i, j, k)
 \end{aligned}$$

- ☐ Smart **rounding** of the optimal solution of the continuous relaxation.
- ☐ The method is guaranteed to find a **feasible 0-1 design**.
- ☐ There are no guarantees on the quality of the obtained design.
- ☐ The 0-1 problem has a **non-empty feasible set**.
- ☐ There exists at least one optimal solution of the 0-1 problem.

Heuristic for the Minimum Weight Problem


minimize	Distance to 0-1 design	minimize	$\ x - \bar{x}^{m-1}\ _1$	
subject to	Compliance constraint	subject to	$c_l(\bar{x}^n) + \nabla c_l(\bar{x}^n)(x - \bar{x}^n) \leq c_l^{\max},$	$\forall n = 0, \dots, m-1, \quad \forall l$
	Manufacturing constraints		$(\bar{x}^n - \hat{x}^n)^T(x - \bar{x}^n) \geq 0,$	$\forall n = 1, \dots, m-1$
	Single material selection per layer and element (DMO)		$Ax \leq b,$	
			$\sum_{i=1}^{N^i} x_{ijk} = 1,$	$\forall(j, k)$
			$x_{ijk} \in \{0, 1\},$	$\forall(i, j, k)$




minimize	Distance to 0-1 design	minimize	$\ x - \hat{x}^m\ _2^2$	
subject to	Compliance constraint	subject to	$c_l(x) \leq c_l^{\max},$	$\forall l$
	Manufacturing constraints		$Ax \leq b,$	
	Single material selection per layer and element (DMO)		$\sum_{i=1}^{N_i} x_{ijk} = 1,$	$\forall(j, k)$
			$x_{ijk} \geq 0,$	$\forall(i, j, k)$



Global Optimization – Outer Approximation

minimize	Compliance		minimize η	
subject to	Compliance constraint		subject to $c(x^p) + (\nabla c(x^p))^T(x - x^p) - \eta \leq 0, \quad p = 1, \dots, P$	
	Mass constraint		$m(x) \leq m_c,$	
	Manufacturing constraints		$Ax \leq b,$	
	Single material selection per layer and element (DMO)		$\sum_{i=1}^{N^i} x_{ijk} = 1,$	$\forall(j, k)$
			$x_{ijk} \in \{0, 1\},$	$\forall(i, j, k)$
			$\eta \geq 0$	



- ☐ **Approximate** the non-linear objective and constraint functions **with linear functions**.
- ☐ Solve a **sequence of linear mixed 0-1 problems**. Guaranteed to converge to **global minimizer**.
- ☐ Since the function $c(x)$ is convex the **linearization constraints** represent **supporting hyperplanes**.
- ☐ The **feasible set** of the 0-1 problem is **non-empty**.

Global Optimization – Outer Approximation

Algorithm: Outer Approximation for solving the minimum compliance problem.

Solve the continuous relaxation. Denote the optimal solution \bar{x}^0

Generate a compliance inequality on \bar{x}^0 , i.e.

$$c(\bar{x}^0) + (\nabla c(\bar{x}^0))^T(x - \bar{x}^0) - \eta \leq 0$$

Solve the rounding heuristic problem. Denote the optimal solution \hat{x}

Set the lower bound $lb = z_R$

Compute the displacement vectors $u_l = K(\hat{x})^{-1}f_l$. Set the upper bound

$$ub = \sum_l w_l f_l^T u_l$$

Set $p = 1$

while $(ub - lb)/ub > \epsilon_0$ **do**

Solve the linear mixed 0-1 problem. Denote the optimal design \hat{x}^p

Generate compliance inequalities for all solutions of the master problem.


Update the lower bound $lb \leftarrow \max\{lb, z_{OA}\}$

For all solutions of the master problem, compute the corresponding displacement vector.



Update the upper bound $ub \leftarrow \min\{ub, \sum_{l=1} w_l f_l^T u_l\}$

Set $p \leftarrow p + 1$

end

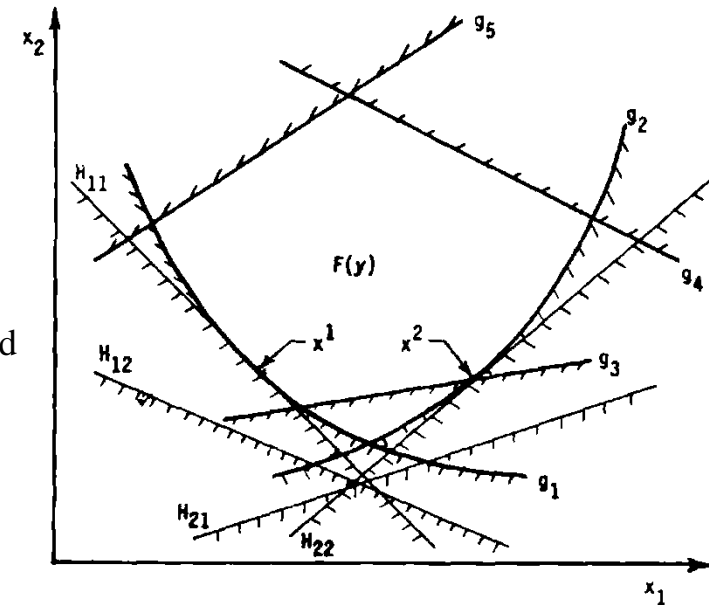

Gap improvement Heuristic/Method – Feasibility Pump

minimize	Distance to 0-1 design	minimize	$\ x - \bar{x}^{m-1}\ _1$	
subject to	Compliance constraint	subject to	$c(\bar{x}^n) + (\nabla c(\bar{x}^n))^T(x - \bar{x}^n) \leq c^{\max},$	$\forall n = 0, \dots, m-1$
	Mass Constraint		$(\bar{x}^n - \hat{x}^n)^T(x - \bar{x}^n) \geq 0,$	$\forall n = 1, \dots, m-1$
	Manufacturing constraints		$m(x) \leq m_c,$	
	Single material selection per layer and element (DMO)		$Ax \leq b,$	
			$\sum_{i=1}^{N^i} x_{ijk} = 1,$	$\forall(j, k)$
			$x_{ijk} \in \{0, 1\},$	$\forall(i, j, k)$
minimize	Distance to 0-1 design	minimize	$\ x - \hat{x}^m\ _2^2$	
subject to	Compliance constraint	subject to	$c(x) \leq c^{\max},$	
	Mass Constraint		$m(x) \leq m_c,$	
	Manufacturing constraints		$Ax \leq b,$	
	Single material selection per layer and element (DMO)		$\sum_{i=1}^{N^i} x_{ijk} = 1,$	$\forall(j, k)$
			$x_{ijk} \geq 0,$	$\forall(i, j, k)$

Algorithm: Gap improvement Heuristic/Method for the minimum compliance problem.

Solve the continuous relaxation. Denote the optimal solution \bar{x}^0

Generate a compliance inequality on \bar{x}^0 , i.e. $c(\bar{x}^0) + (\nabla c(\bar{x}^0))^T(x - \bar{x}^0) - c^{\max} \leq 0$

Solve the rounding heuristic problem. Denote the optimal solution \hat{x}

Set the lower bound $lb = z_R$

Compute the displacement vectors $u_l = K(\hat{x})^{-1}f_l$. Set the upper bound $ub = \sum_l w_l f_l^T u_l$

Set the target value $c^{\max} = (ub + lb)/2$

while $(ub - lb)/ub > \epsilon_0$ **do**

Set $p = 1$

while $c(\hat{x}^p) > c^{\max}$ **do**

Attempt to solve the 0-1 problem.

If it is infeasible then

Update the lower bound $lb \leftarrow c^{\max}$

Update the target value $c^{\max} \leftarrow (ub + lb)/2$

else

Denote the optimal solution \hat{x}^p

Generate compliance inequalities on the solutions from the 0-1 problem.

Solve the nonlinear relaxation. Denote the optimal solution \bar{x}^p

Generate a compliance inequality on \bar{x}^p , i.e. $c(\bar{x}^p) + (\nabla c(\bar{x}^p))^T(x - \bar{x}^p) - c^{\max} \leq 0$


Set $p \leftarrow p + 1$

end

end

Update the upper bound $ub \leftarrow c(\hat{x}^p)$. Update the target value $c^{\max} \leftarrow (ub + lb)/2$

end

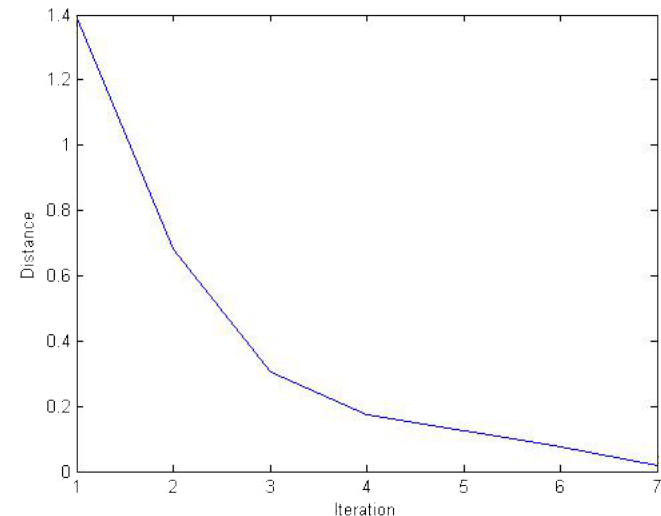

Numerical Example – Layered Clamped Plate

Problem	Elements	DOF	Variables		Foam	Orthotropic
P1G1	4x4	405	640	Ex [GPa]	0.065	34.0
P1G2	8x8	1445	2560	Gxy [GPa]	-	9.0
P1H1	16x16	5445	10240	Major Poisson's ratio	0.47	0.29
P1H2	32x32	21125	40960	Density [kg/m³]	200.0	1910.0

☐ Distributed Out of Plane (Static) Loading

☐ Clamped plate 1.0m x 1.0m x 0.005m


☐ 8 layers of equal thickness

☐ 5 candidate materials


☐ Glass fiber reinforced epoxy { -45°, 0°, 45°, 90° }

☐ Isotropic polymeric foam (allowable mass is 49.4[kg])


☐ Q9 Plate Elements

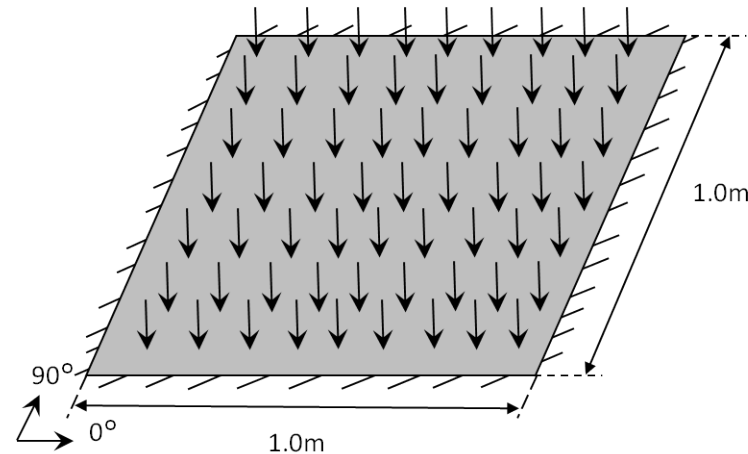


Continuous Relaxation

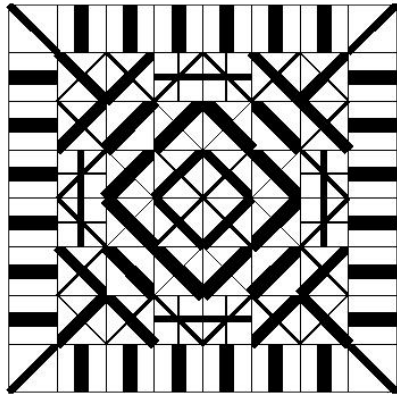


Layer 1

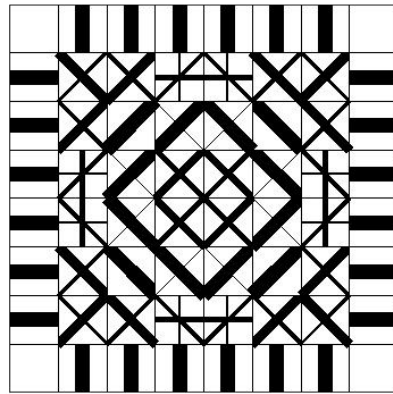

Layer 2

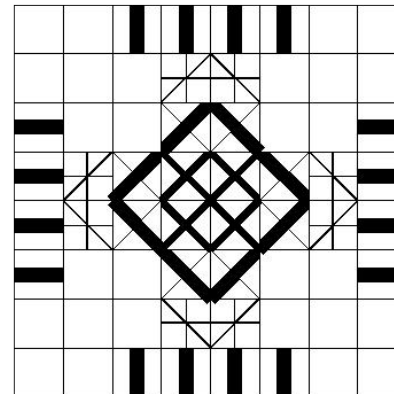


Layer 3

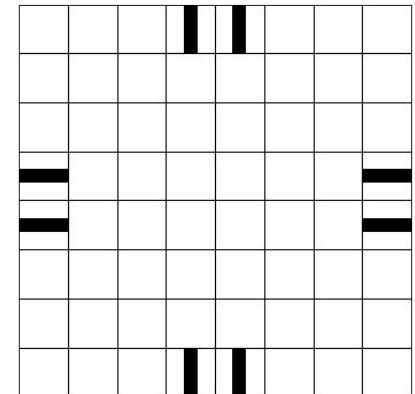


Layer 4


Rounding Heuristic – Relative Optimality Gap of 2.8%

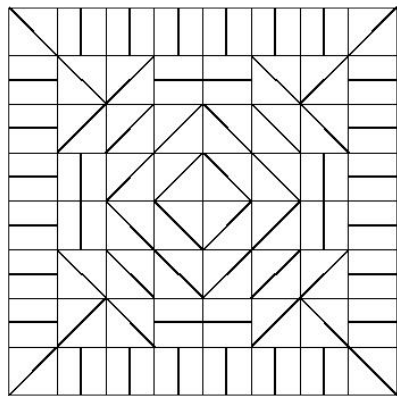


Layer 1

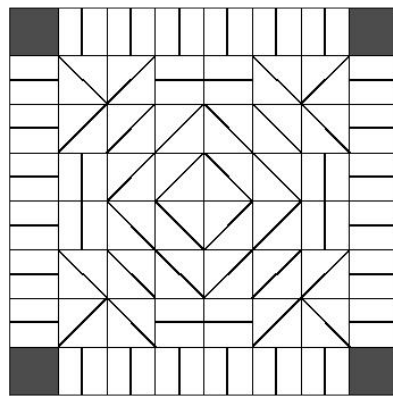


Layer 2

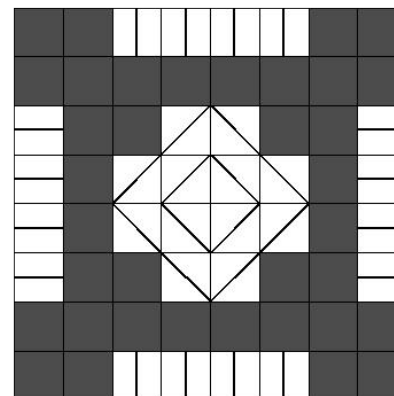

Layer 3

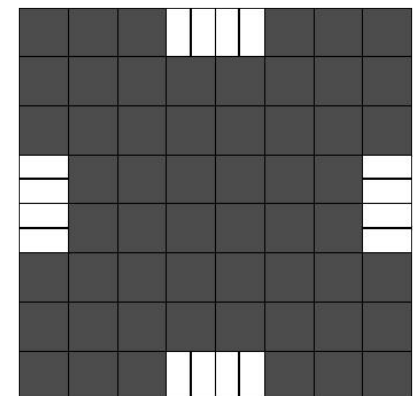

Layer 4



Numerical Example – Layered Clamped Plate

Numerical Results with the Heuristics

Problem	Objective	Elements	DOF	Variables	Itns I.P.	Itns Heuristic	Time [h:m:s]		Bounds		Gap (%)
							I.P.	Heuristic	Lower	Upper	
P1H1	Compliance	16x16	5445	10240	20	1	00:01:54	00:00:02	1.797	1.933	7.0
P1H1	Weight	16x16	5445	10240	21	17	00:02:03	00:22:43	42.560	43.428	2.0
P1H2	Compliance	32x32	21125	40960	22	1	00:15:07	00:00:15	1.787	1.923	7.1
P1H2	Weight	32x32	21125	40960	20	10	00:24:07	00:58:46	37.803	38.920	2.9

- The obtained results showcase the **excellent convergence properties** and the ability of the primal-dual interior point method to react swiftly to changes of scale of our problems.
- The method managed to converge in 20 to 22 iterations in all the examined cases.

Numerical Example – Layered Clamped Plate

Numerical Results with the gap improvement method

Problem	Objective	Elements	DOF	Variables	Time [h:m:s]	Itns	Bounds		Gap (%)
							Lower	Upper	
P1H1	Compliance	16x16	5445	10240	00:10:12	2	1.797	1.810	<1%
P1H1	Weight	16x16	5445	10240	0:21:51	1	42.560	42.994	<1%
P1H2	Compliance	32x32	21125	40960	15:32:12	3	1.787	1.804	<1%
P1H2	Weight	32x32	21125	40960	12:25:45	2	37.803	38.082	<1%

Numerical Results with Outer Approximation


Problem	Objective	Elements	DOF	Variables	Time [h:m:s]	O.A.		Bounds		Gap (%)	
						Itns	Cuts	Lower	Upper	Heuristic	O.A.
P1G1	Compliance	4x4	405	640	00:00:12	1	4	1.651	1.654	2.8	<1%
P1G1	Weight	4x4	405	640						<1%	
P1G2	Compliance	8x8	1445	2560	00:10:00	50	94	1.817	1.835	49.1	<1%
P1G2	Weight	8x8	1445	2560	00:23:48	111	352	37.484	37.484	2.9	<1%

□ The gap improvement algorithm was used as a **global optimization method** and was able to solve all the considered problem instances to **global optimality**.

□ **Outer approximation** is able to solve the considered problem only for **small scale** instances.

Ongoing Work – Manufacturing Constraints

- Articles covering optimal design of composite structures under manufacturing constraints are scarce in the literature and generally only (small) part of a structure and small-scale problems are considered.
- It is common practice to divide the structure into panels that may be designed independently, and consider manufacturing constraints **in plane** and **through the thickness** of the composite.

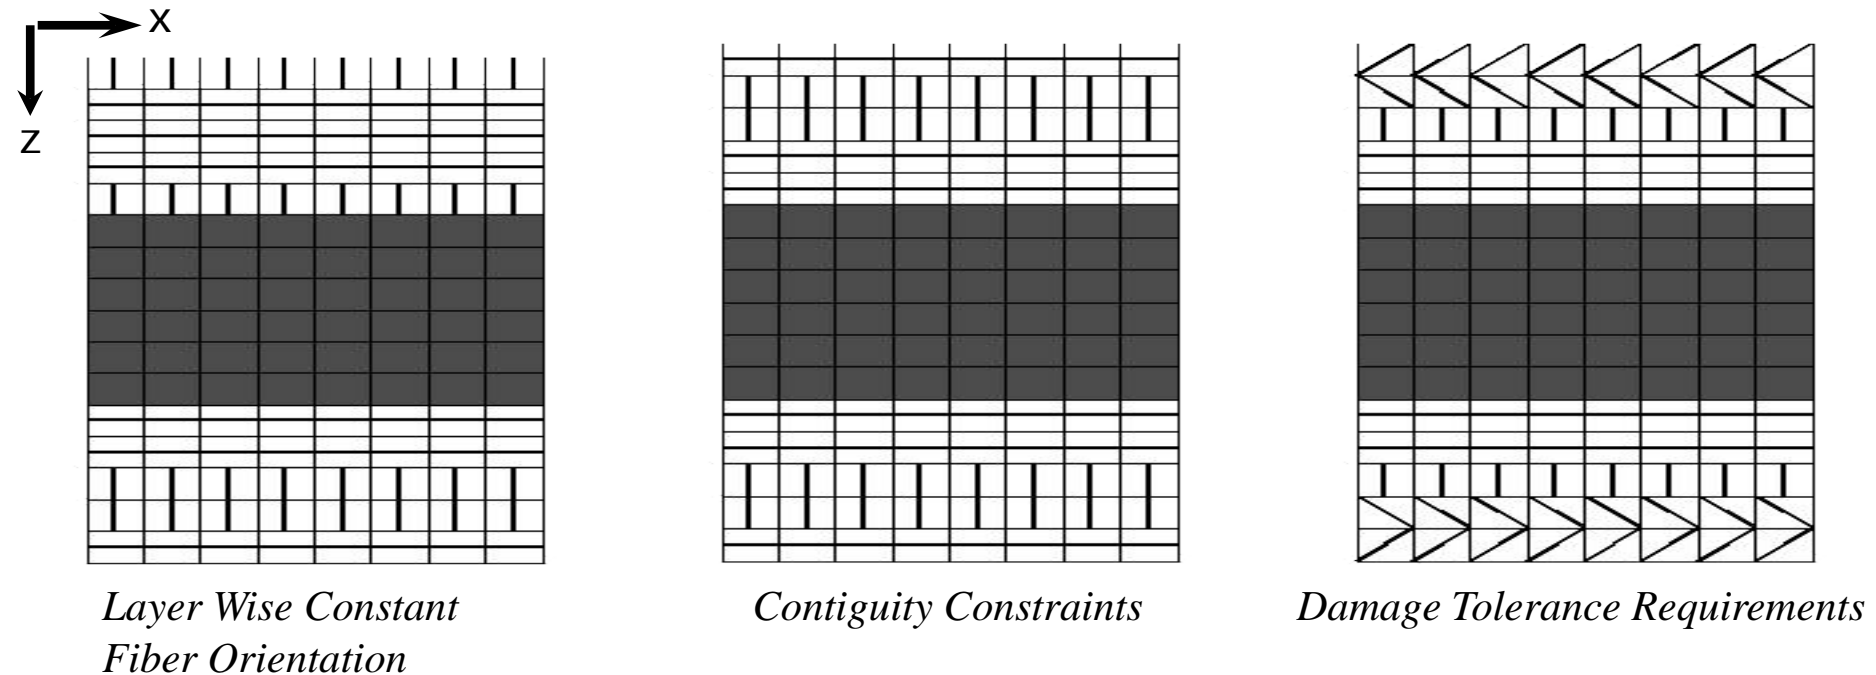

References

- [1] Bendsøe M. P. and Sigmund O. Topology Optimization - Theory, Methods and Applications. Springer, Berlin, 2003.
- [2] Lund E. and Stegmann J. On structural optimization of composite shell structures using a discrete constitutive parameterization. Wind Energy, 8(1):109124, 2005.
- [3] Stegmann J. and Lund E. Discrete material optimization of general composite shell structures. International Journal for Numerical Methods in Engineering, 62(14):2009 2027, 2005.
- [4] Nocedal J., Wächter A., and Waltz R. Adaptive barrier update strategies for nonlinear interior methods. SIAM Journal on Optimization, 19(4):16741693, 2009.
- [5] Fletcher R. and Leyfer S. Solving mixed integer nonlinear programs by outer approximation. Mathematical Programming, 66(1-3):327349, 1994.
- [6] Bertacco L., Fischetti M., and Lodi A. A feasibility pump heuristic for general mixedinteger problems. Discrete Optimization, 4(1):6376, 2007.

Acknowledgements

This work was supported by The Danish Council for Independent Research | Technology and Production Sciences (FTP) under the grant "Optimal Design of Composite Structures under Manufacturing Constraints".

**THANK YOU FOR YOUR
ATTENTION**